



SUBARU

INSTALLATION INSTRUCTIONS

PART NUMBER: E101SFL000

DESCRIPTION:


Impreza Sedan Sill Plates

KIT CONTENTS:





- | | |
|-------------------------------|------------------------------------|
| 1. Front Side Sill Plate (2). | 4. Front Sill Plate Templates (2). |
| 2. Rear Side Sill Plate (2). | 5. Rear Sill Plate Templates (2). |
| 3. Squeegee (1). | 6. Alcohol wipes (4). |



1. Front Side Sill Plate (2)



2. Rear Side Sill Plate (2)



4. Front Sill Plate Templates

5. Rear Sill Plate Templates



3. Squeegee



6. Alcohol Wipes

TOOLS REQUIRED:



Soft lint-free
Microfiber Cloth



Masking Tape



Scissors

MEANING OF CHARACTERS:



Denotes warnings that may lead to serious physical injury or vehicle damage.



Denotes quality processes to be checked prior to moving to the next step.

Denotes safety equipment required to be used such as a mask, goggles, rubber gloves, and hearing protection.



Denotes cautions to be taken to avoid physical injury or electronic component damage.



Denotes specific tools that are necessary to complete the step.



Mask



Goggles



Denotes cautions to be taken to avoid vehicle and component damage.



Denotes instructional steps necessary to complete the process.



Rubber Gloves



Hearing Protection


PREPARATION - BEFORE INSTALLATION:

1. This product should be installed with proper installation tools.
2. Install this product while observing all warnings and precautions stated in this instruction booklet.
3. **VERY IMPORTANT: Thoroughly wash vehicle with Soap and Water.**
4. Parts storage should be flat at room temperature and in a clean dry place. **Care should be taken to avoid a dusty environment.**


Notes to the Installer

1. Read the entire installation instructions prior to beginning the installation of the accessory.
2. Ensure that the vehicle is properly protected in the area that the accessory is to be installed.
3. To prevent vehicle damage, never place tools on top of painted surfaces, seats, dash pad, console or floor carpet / mat.
4. Always wear appropriate safety gear to include gloves and eye protection when required.


Left Front Door Sill

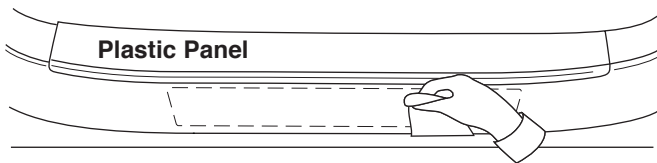


Left Rear Door Sill

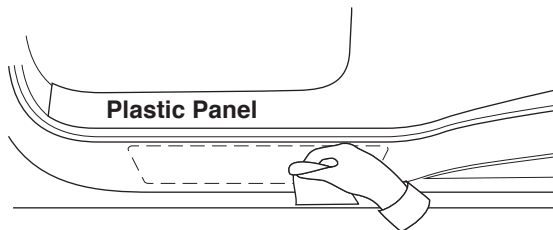

Left Front Door Sill

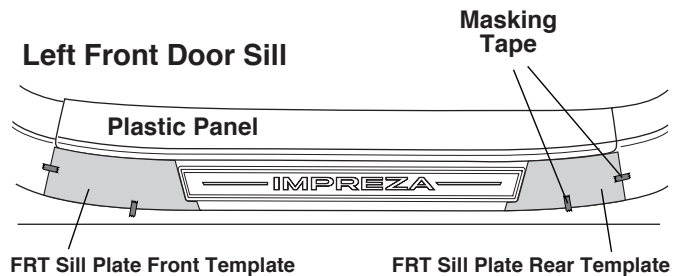

Left Rear Door Sill

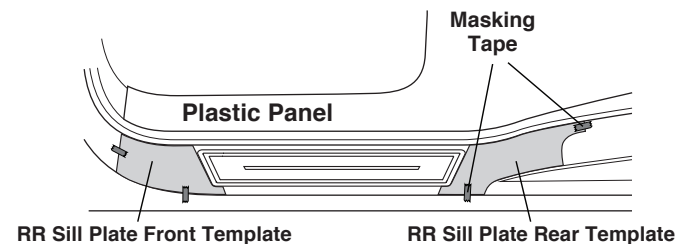

1 Alcohol

- Thoroughly wash vehicle with a soft lint-free cloth. Wipe front and rear sill areas where the Sill Plates will be installed with alcohol wipes. Allow the area to dry completely.


2 Dry Fit

- Cut out supplied templates. Slide templates under plastic panel. Line up edges of the plastic panel with the lines on the templates. Use masking tape to secure templates into place. Locate front and rear Sill Plates into place using the templates as shown above.
NOTE: Sill Plate should remain on flat surface only, not on radius.


Sill Plate

Adhesive side of Sill Plate

Liner

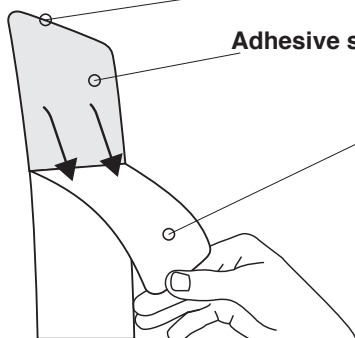

Left Front Door Sill


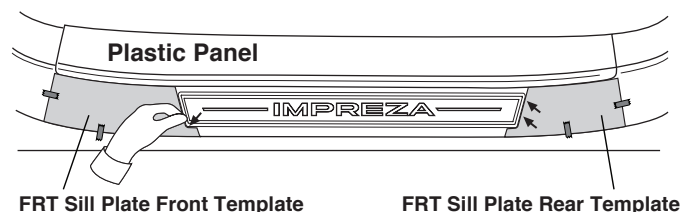








3 Separate Liner


- Remove liner from Sill Plate. After removal of part liner, to prevent contamination, limit touching adhesive side of Sill Plate by handling on the edges.

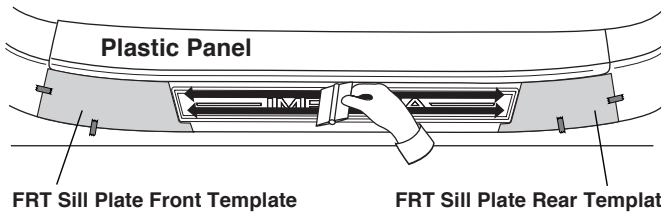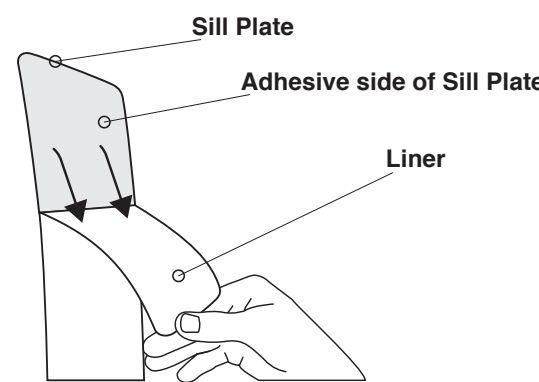4 Sill Plate Alignment

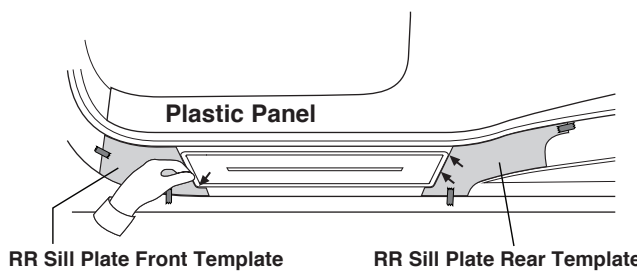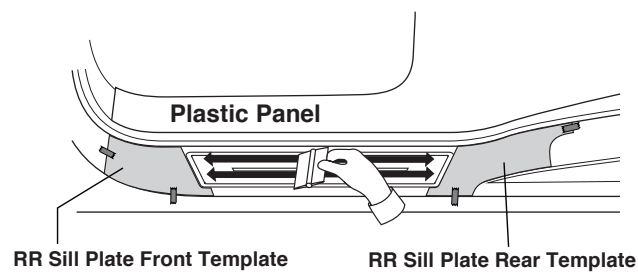
- Start by aligning the edge of Sill Plate with the template as shown. Next, pivot the top edge of the Sill Plate against the plastic panel and lay into position.
NOTE: If mislocated, lift straight up and reposition into correct location.

<h3>Left Front Door Sill</h3> 					
5 Adhere To Surface  Starting in the center, squeegee the top surface of the Sill Plate onto the surface of sill area as shown, using firm, overlapping squeegee strokes. Carefully remove template and save for use on the right side of vehicle.		6 Separate Liner  Moving to the Left Rear Sill Plate, remove liner from Sill Plate. After removal of part liner, to prevent contamination, limit touching adhesive side of Sill Plate by handling on the edges.			
<h3>Left Rear Door Sill</h3> 		<h3>Left Rear Door Sill</h3> 			
7 Sill Plate Alignment  Start by aligning the edge of Sill Plate with the template as shown. Next, pivot the top edge of the Sill Plate against the plastic panel and lay into position. NOTE: If mislocated, lift straight up and reposition into correct location.		8 Adhere To Surface  Starting in the center, squeegee the top surface of the Sill Plate onto the surface of sill area as shown, using firm, overlapping squeegee strokes. Carefully remove template and save for use on the right side of vehicle.			
*(Repeat Steps 1-8 for right side of vehicle.)					
DESCRIPTION Side Sill Plate		ISSUE 00	DATE 06/07/16	SUBARU OF AMERICA	PAGE 3/04

Care and Cleaning

Items to be Checked		Results of the Check
	Wash side sill plates with warm soapy water as needed, (do not use other chemical based cleaners).	

Visual Check

Items to be Checked		Results of the Check
	Make sure all edges are firmly adhered.	