




Pleasure-Way


phone 306.934.6578
fax 306.934.7085
toll free 1.800.364.0189


Pleasure-Way Industries Ltd. | 302 Portage Avenue | Saskatoon, SK | S7J 4C6

Remove the positive cable inside the battery box that connects the batteries 12v + to the DCD. It is the large red 2 ought wire in the photo below tightened down with an 11/16" nut. You still need to be careful as positive power will be present on the DCD due to the Xantrex inverter's capacitor. Be careful not to short to the ground post which will be on the opposite side of the 12v + post.

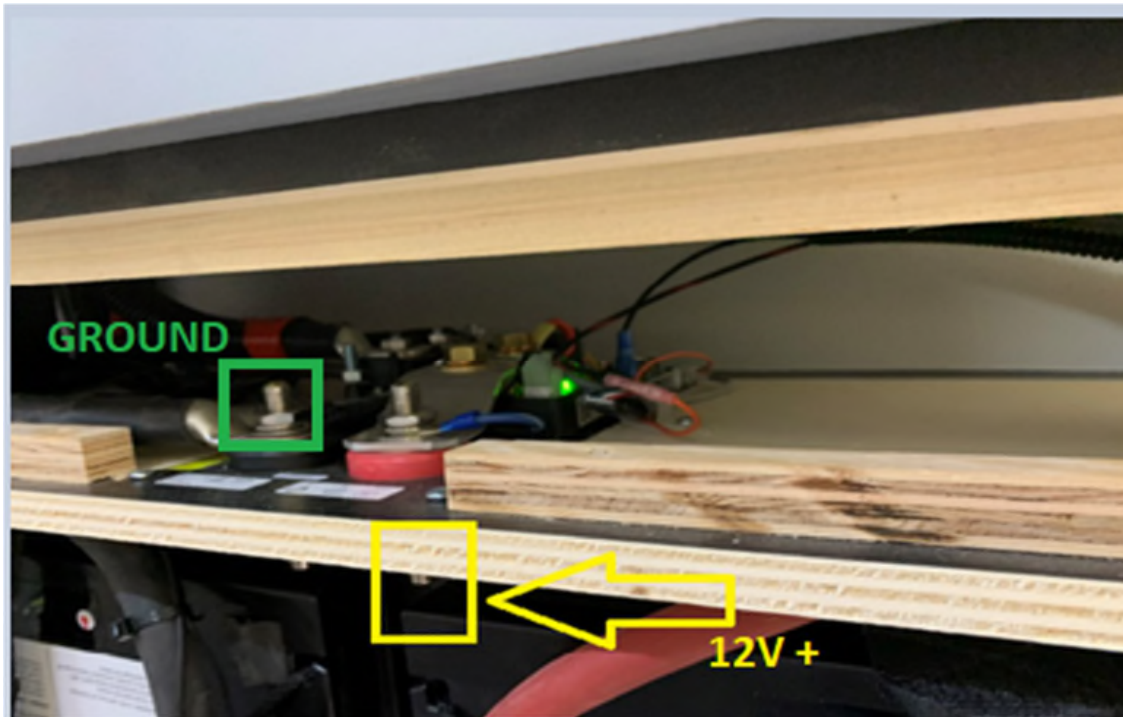

Then start taking apart the DCM3 connections on top of the DCD panel. Start by removing the Z shaped bar by removing the front 11/16" nut (#1 in photo) then the 9/16" brass bolts (#2 + 3 in photo). Then remove the screw in the clamp (#4 in photo) that is holding down the grey communication cable. You will have to remove the ground wire on the DCM3 before fully removing the module. It is attached with a spade connector behind the DCM3. Unplug the battery thermistor wire and disconnect the grey communication cable. You should now be able to slide the DCM3 out of the DCD assembly.

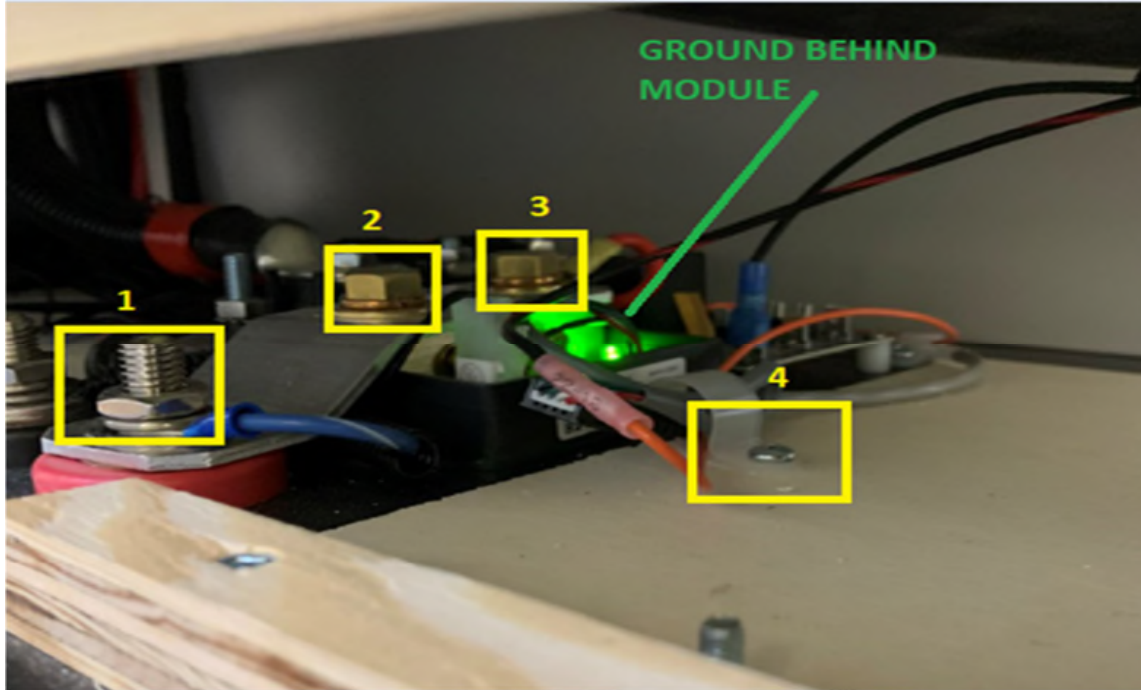

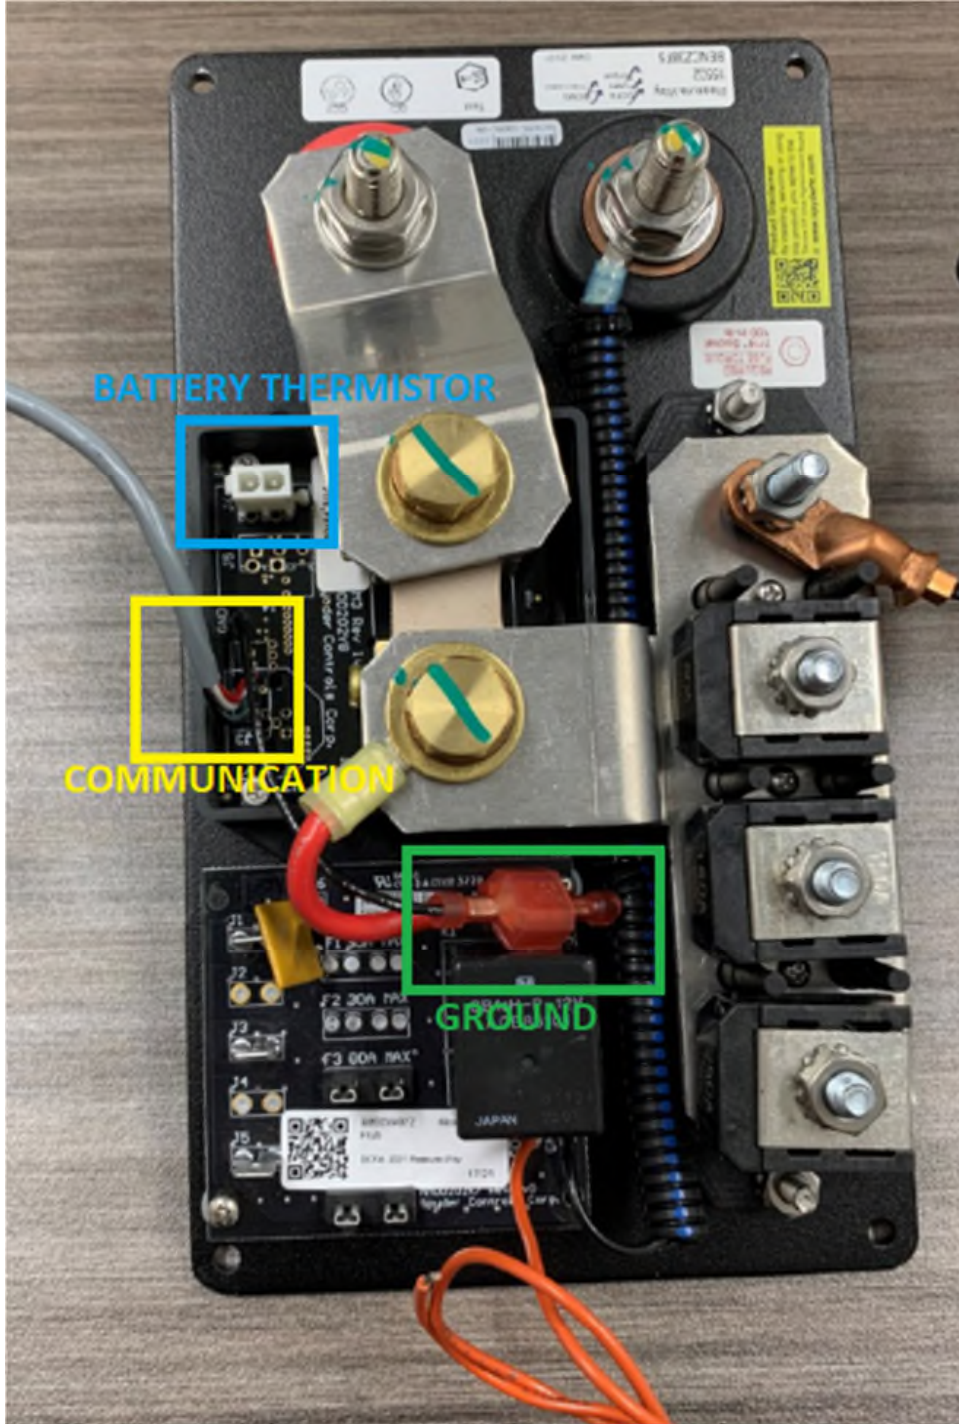

When installing the new DCM3, slide the module into place connect the ground first. Then connect the battery thermistor and communication cable back into their respective locations. Place the Z shaped bar back into position and tighten down the 9/16" brass bolts. Tighten down the 11/16" nut on top of DCD and connect 12v + power back inside the battery box.