


PART No. E7110CA100 BRZ Side Fin Blade Black

Installation Instruction

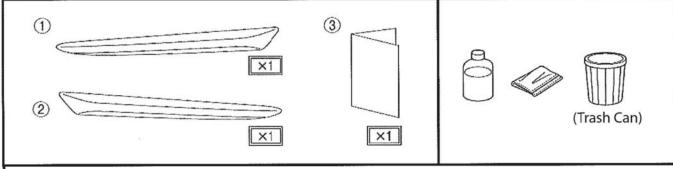

NOTE:

- Do not wash the vehicle for 24 hours following installation of this product.
- If this product requires cleaning after installation, wipe with a soft cloth or sponge with mild detergent and wipe thoroughly with a dry cloth. Do not use gasoline, thinner, acid, alkaline or other solvent based products.
- The recommended adhesive surface temperature range is 77°F 104°F (25°C 40°C).
- If the surface temperature is below 60°F (15°C), heat the double sided tape and Front Fender surface to a temperature of 77°F 104°F (25°C 40°C).

