




UTILITY HOOK MANUAL RR GATE KIT

Installation Manual


Genuine part number F5510SL060
 Applicable car model FORESTER 2025MY ~

Kit includes


No.	Components	Qty.	Marks
1	Utility Hooks	2	Part Number F5510SL050 × 1
2	Turn Nuts	2	
3	Washers	2	
4	Caution Labels	1	
5	Rear Gate Stopper	1	Part Number J2010SL200 × 1



※Instruction manuals are included in each one.

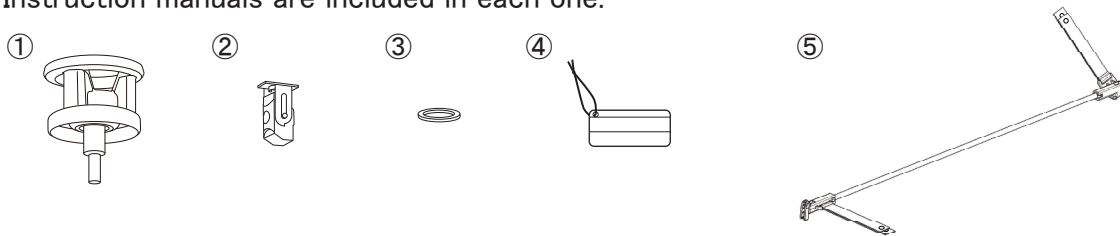

<Installation Completed Drawing>

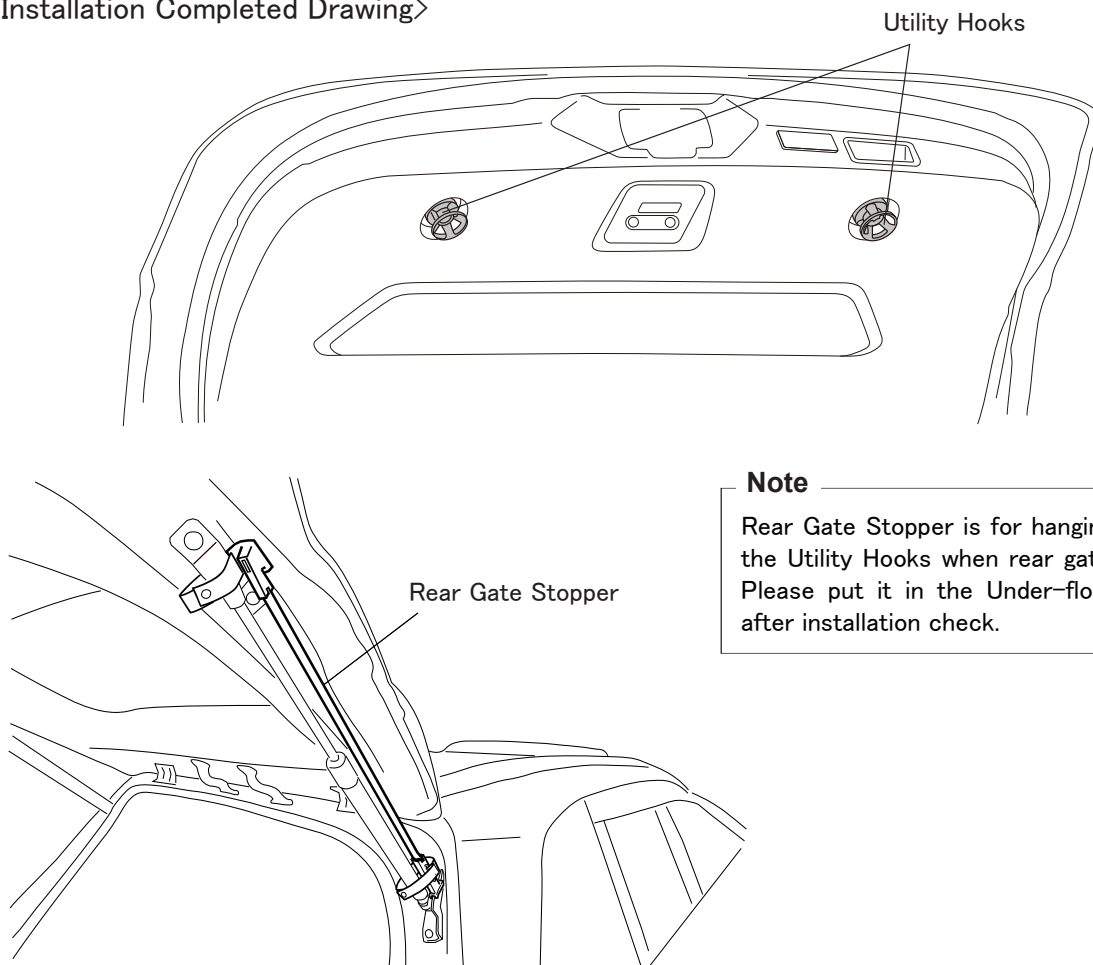

Note

Rear Gate Stopper is for hanging stuff on the Utility Hooks when rear gate opening. Please put it in the Under-floor storage after installation check.

Installation Instructions

1. Remove the Trim caps of the rear gate with a flat blade screwdriver.

⚠ Caution

The removed trim caps will not be re-used. Place trim caps in glove box.

2. Fit the washer to the turn nut, and slightly insert it into the screw of the Utility hook.


3. Insert the Utility Hook to the rear gate and turn it clockwise by hand.

⚠ Caution

When fastening the Utility Hook, install it securely until it touches the vehicle trim and the hook does not rattle and turn.

👉 Tip






Make sure that the screws are tightened before installing the hooks. If the hook spins freely, use a flathead screwdriver to correct the direction of the turn nut (1) and check it that the screws are tightened again (2). Turn nut will be pulled to downward by screwed bolt (3) if its position is correct.

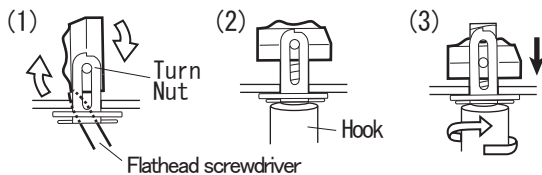

4. Tie on the caution label to the installed utility hook.

👉 Tip

[Reference] How to tie on the caution label.

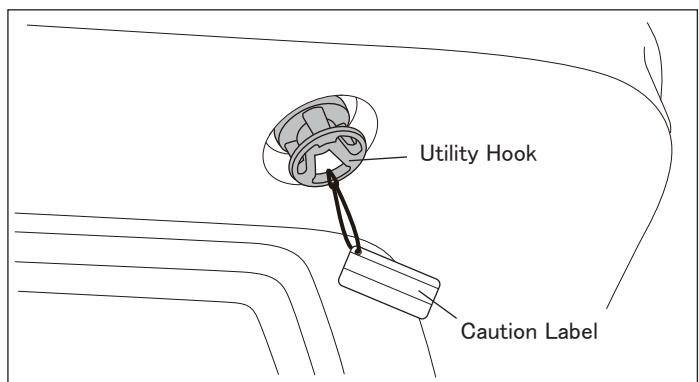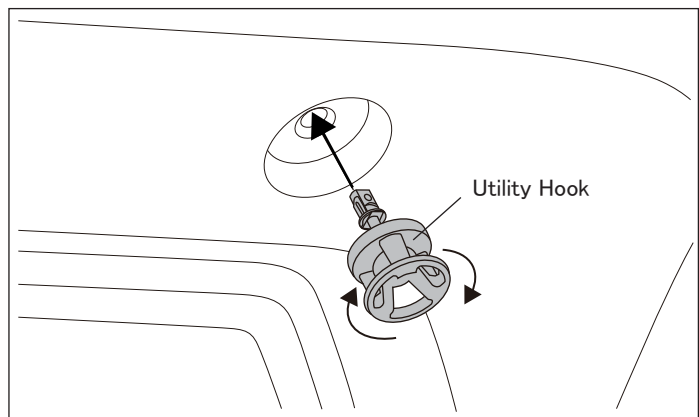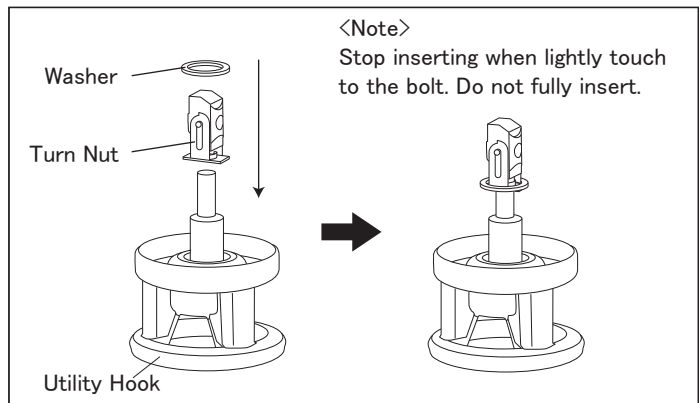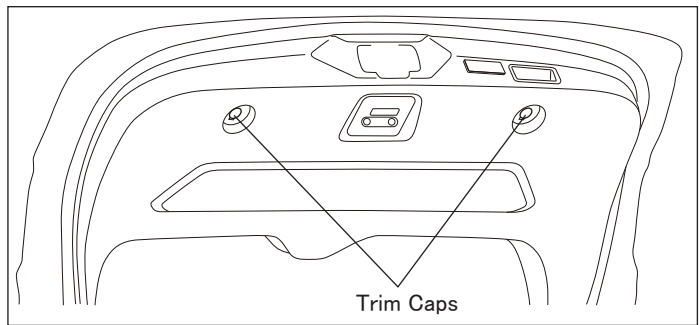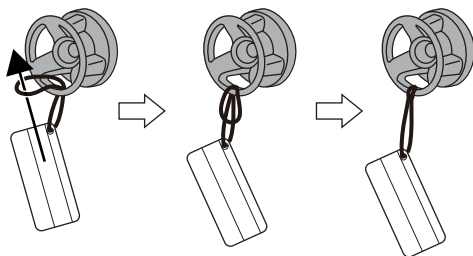

Post-Installation Check

Check the followings;

- Make sure that there is no rattling or looseness of each Utility Hooks.
- Make sure that the Caution label is tied on to the Utility Hook.

5. Rear Gate Stopper Installation

Note


Please put the stopper in the Under-floor storage after installation check.
This stopper is only for RH side when rear gate is opening. It cannot be installed on the LH side or when rear gate closing.

- (1) Hold the bottom end of the stopper with your right hand and hold it near the Bracket B.




Tip

Please make sure that do not scratch to vehicle body by the end of the stopper when installing.

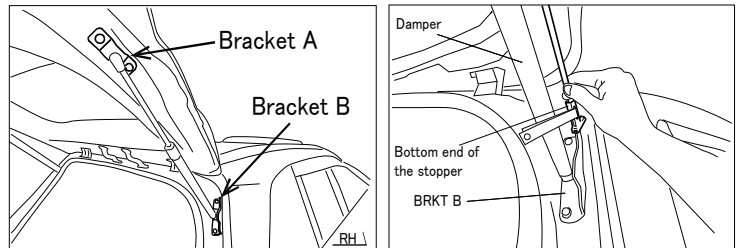


- (2) Run the band of upper side through the Bracket A as shown in the figure.

Then insert the tip of the holder into the gap between the Bracket A and rear gate panel.

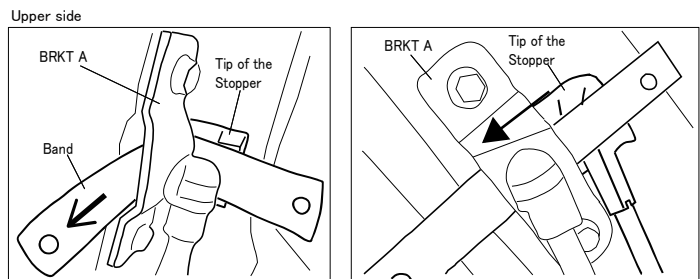

- (3) Properly fit a groove of the bottom end of the stopper to the Bracket B. There is a gently match point of the groove and the bracket edge.




- (4) Fasten the button of the band of upper side.
Then wrap the band of the bottom side around the damper and fasten the button.

Caution

Please make sure that the button is fastened properly before use the hooks. There is a risk of breakdown or injury.

- (5) Please do it in reverse order when remove the stopper.

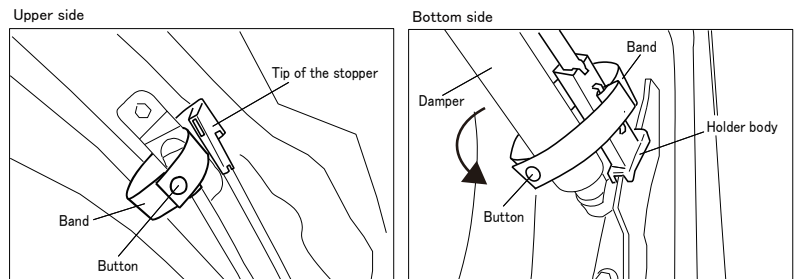

Revised Content

Δ	Content	Date
Δ 00	Created New	2023. 10. 06
Δ 01		
Δ 02		