



Part Number: H451SFL200

### Installation Instructions

Description: Fog Light Kit, Impreza

### Kit Contents



Fog Lights, Driver: 1  
Passenger: 1



Relay: 1



Switch: 1



Bolt: 2



Clip: 2



J-Nut: 2



Fog Light Cover, Driver: 1  
Passenger: 1

### Tools Required

10mm Socket and Ratchet



Philips and flat head screw drivers



Fastener Remover



Torque Wrench


Trim Tool



### Icon Legends / Cautions



: Remove/Disconnect



: Install




: Location of Clip or Screw

- 1) Read all instructions before proceeding with installation. If uncomfortable performing any procedures, have installation performed by a Subaru dealer technician.
- 2) Take care not to damage vehicle components during removal and installation.
- 3) Route wiring so that it does not rub against any sharp edges.




Installation

1-1

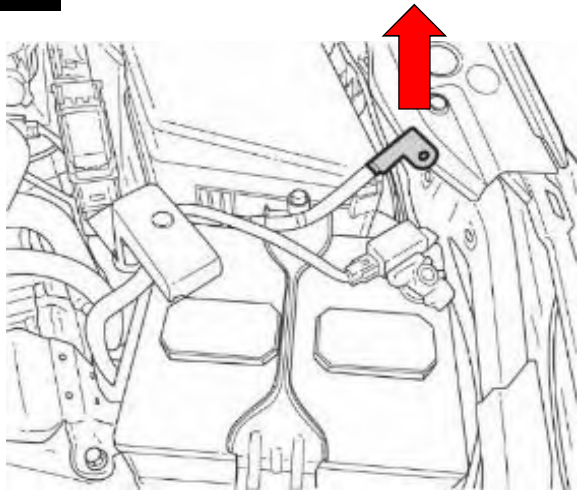

Disconnect Negative (-) battery cable from the battery sensor terminal. Hold the battery sensor carefully when removing the 10mm nut.

1-2

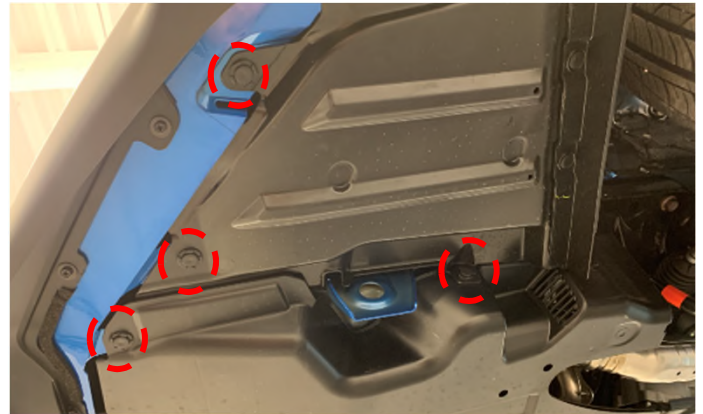

Remove four (4) clips and retain for reinstallation

1-3



Pull down belly pan to reveal remaining bolt holding fender liner in place.

Remove bolt and pull down the fender liner. Retain bolt for reinstallation. Free fog lamp harness connector from the breakaway tape.

1-4




From inside, locate and remove philips head screw securing fog light cover. Retain screw for reinstallation

Remove fog light cover.



**Installation**


**1-5**

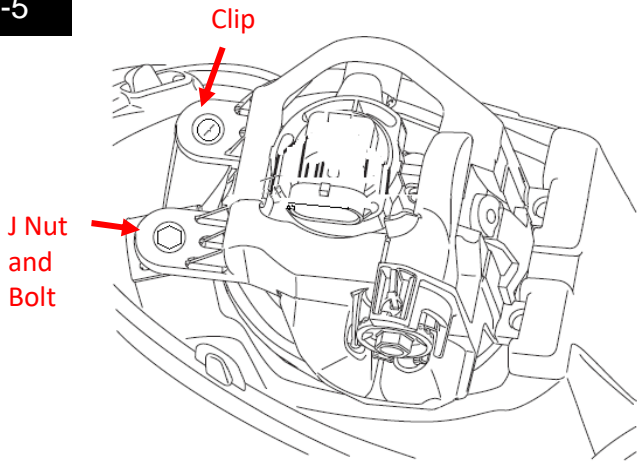

Install J-Nut into bumper cavity at the pre-arranged location. Make sure the threaded side is pointing toward the outside (front). Insert lamp assembly into bumper cavity from behind the bumper. Install clip and bolt. Torque bolt to 7.5Nm (5.5 ft lbs)

Plug in lamp connector, ensure the tab locks into place

**1-6**

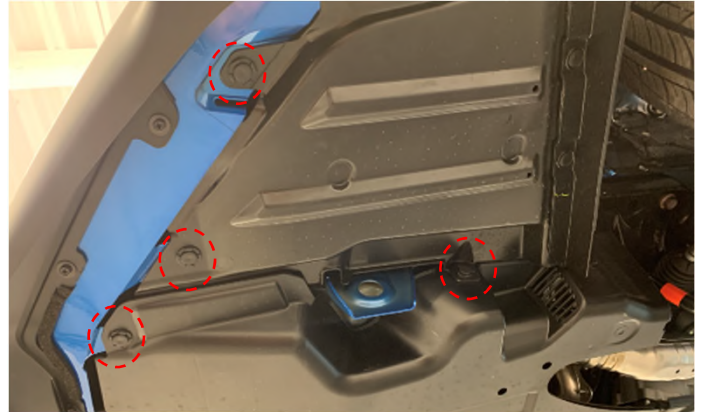

Install Fog Lamp Cover. Reinstall fog light cover screw, fender liner cover bolt and four (4) clips.


Repeat install for remaining side of vehicle.

**1-7**



Using a trim tool, remove the side cover of the lower dash console

**1-8**

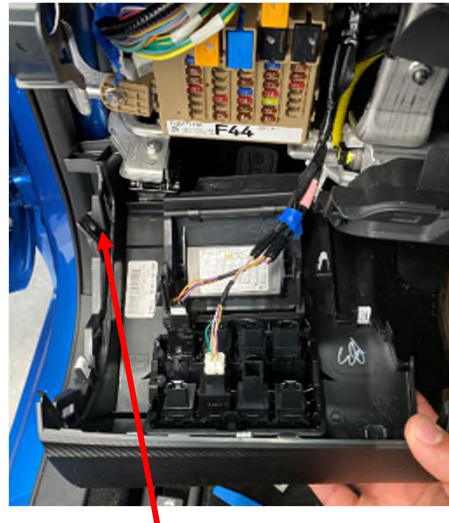


**Screw Location**

Remove philips head screw securing switch panel  
 Pull lower dash console rearward to disengage all clips  
 Disconnect all connections from switch panel  
 Release pre-wired connector



Installation

1-9

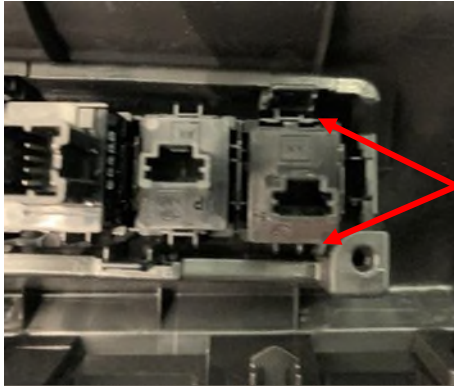

Locking tabs

Using a flat bladed screw driver, release the top and bottom tabs of the right most switch blank.

1-10




Install fog lamp switch. Ensure both tabs lock into place.

Plug in all connections to switch panel

Reinstall lower dash console

1-11

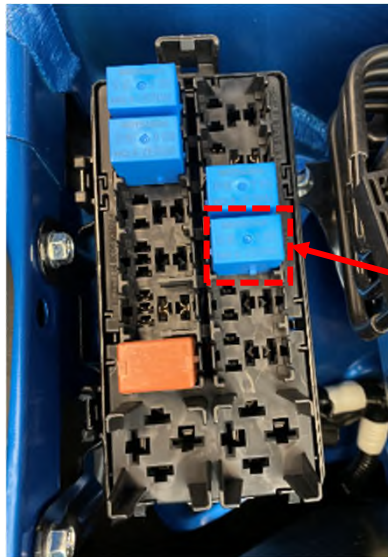


Fog lamp relay location

Open hood and access passenger side relay panel

Install fog lamp relay into above noted position

1-12

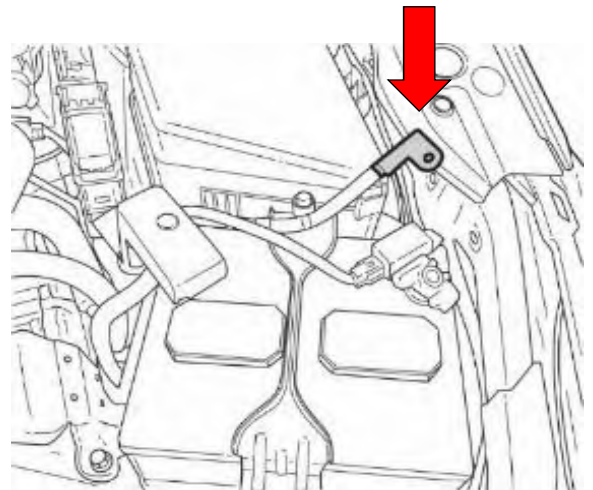

Connect Negative (-) battery cable to the battery sensor terminal.

Torque to 7.5Nm (5.5 ft lbs)