



GENUINE PARTS


INSTALLATION INSTRUCTIONS

PART NUMBER: H671SXC203


DESCRIPTION: 2024 Ascent Wireless Charger

**KIT CONTENTS:**

Wireless Charging Assembly

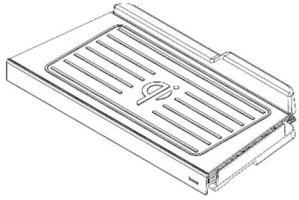


T-Harness



Tie Wrap (Quantity=6)



Foam Tape (Quantity=2)

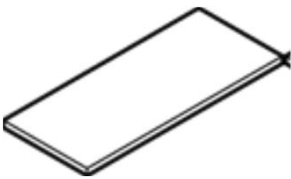


Wireless Charging Information Card



**TOOLS REQUIRED:**

Philips Screwdriver



Torque Wrench



Panel Removal Tool



10mm socket and ratchet



Nipper



DESCRIPTION 2024 Ascent Wireless Charger	ISSUE 0.1	DATE 08/21/2023	SUBARU OF AMERICA	PAGE 1 / 7
---	--------------	--------------------	-------------------	---------------



GENUINE PARTS  
INSTALLATION INSTRUCTIONS

PART NUMBER: H671SXC203


DESCRIPTION: 2024 Ascent Wireless Charger

1

Engage Parking Brake.

Turn vehicle OFF.

2

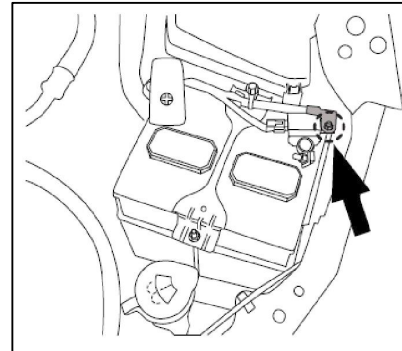

Disconnect the negative battery terminal using a 10mm socket/ratchet.

NOTE: If equipped, disconnect eyelet cable only.

3



Use panel removal tool to remove rubber mat and plastic tray and discard.

4



Use panel removal tool to remove console cover. (Removing shift knob is optional.)



GENUINE PARTS

INSTALLATION INSTRUCTIONS

PART NUMBER: H671SXC203

DESCRIPTION: 2024 Ascent Wireless Charger

5




Disconnect console power connection.

6




Locate the pre-wired connector just below the USB outlets.

7

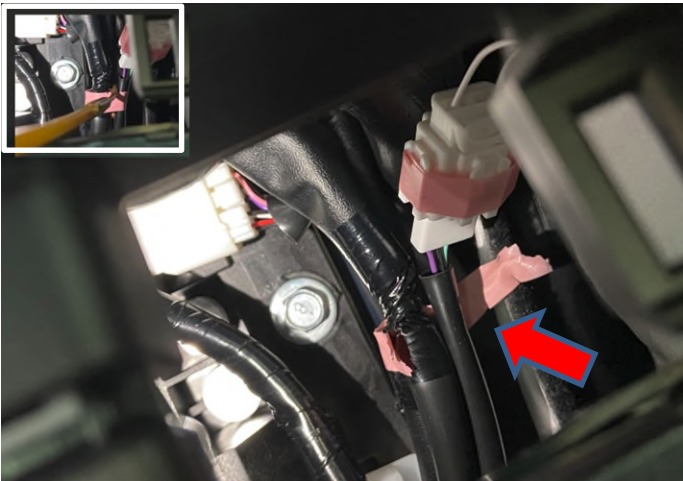

Using a wire hook or equivalent (not sharp), release the breakaway tape from the connector. Be careful not to damage any wires.

8

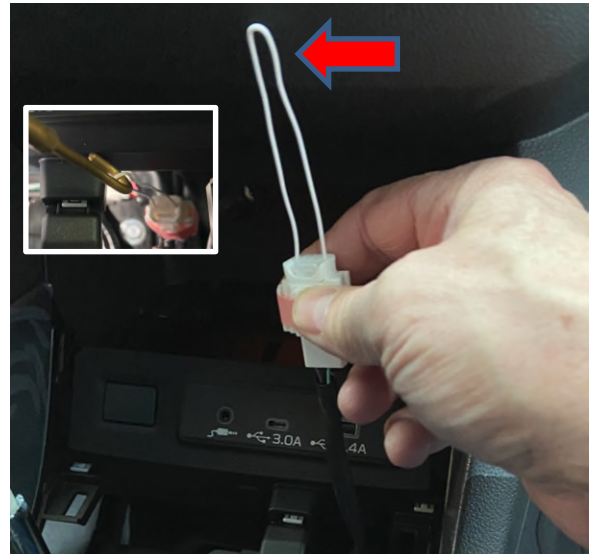

Gently pull the pre-wired connector up and out via the blank terminating connector loop.

DESCRIPTION  
2024 Ascent Wireless Charger

ISSUE  
0.1

DATE  
08/21/2023

SUBARU OF AMERICA

PAGE  
3 / 7

9



Disconnect and discard the blank terminating connector.

10



Route the included harness down through the large opening and up around to the pre-wired connector.

11



Plug included harness into pre-wired connector.

12



Wrap connector in foam tape.



GENUINE PARTS

INSTALLATION INSTRUCTIONS

PART NUMBER: H671SXC203

DESCRIPTION: 2024 Ascent Wireless Charger

13



Tie up excess harness, trim the tie wrap, then tuck down in open cavity.

14




Tuck excess harness back in the cubby hole.

15



Leave about 4 inches of harness out.

16

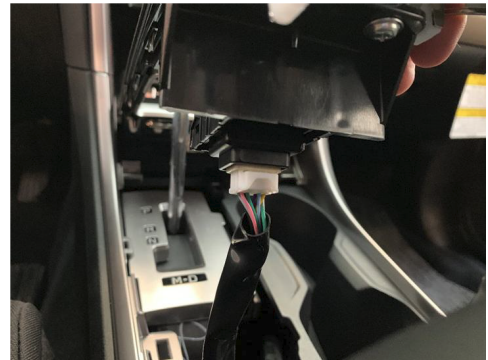

Reconnect console power connector.



GENUINE PARTS

INSTALLATION INSTRUCTIONS

PART NUMBER: H671SXC203

DESCRIPTION: 2024 Ascent Wireless Charger

17



Reinstall console cover.

(NOTE: Wireless Charger will not seat without this cover back in place.)

18



Connect wireless charger.

19



Align tabs and push down on Wireless Charger to seat.

20



Place operation manual in glove box.




GENUINE PARTS

INSTALLATION INSTRUCTIONS

PART NUMBER: H671SXC203

DESCRIPTION: 2024 Ascent Wireless Charger

21

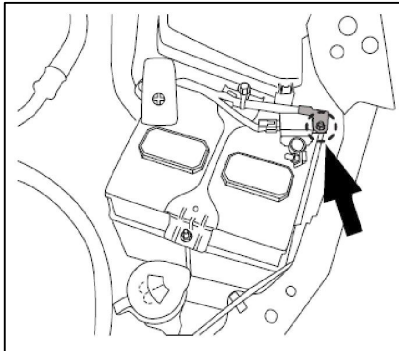

After all the connections are complete, re-connect the vehicle's negative battery cable. Using a 10mm socket/torque wrench, tighten the 10mm nut to 7.5 Nm +/- 2 Nm (0.76 Kgf-m +/- 0.2 Kgf-m, 5.5 ft-lbs +/- 1.5 ft-lbs).

22

Function Check

Place car in ACC or ON mode.

Ensure wireless charger indicator light illuminates in white.