Keystone RV Company

SAFETY ADVISORY #22-435

Dutchmen Stabilizer Jack Switch

Keystone is conducting a voluntary RECALL notification campaign in accordance with the National Highway Transportation and Safety Act. It has been decided that the vehicles in the recall population have an electric stabilizer jack switch that is not waterproof from the back side of the switch. Under certain conditions during travel, the back side of the extend/retract switch for the electric stabilizer jacks can short out causing the jacks to extend during travel, leading to an increased risk of personal injury, and or vehicle crash.

Models Included:

Year	Model	Serial Number Ranges
2023	Aspen Trail – All models	P8920010 - P8920130
2023	Coleman – All models except 18FQ, 202RD	PH930581 - PH930814 PM930843 - PM931021
2023	Kodiak – All Except 199RK, 201QB, 22SBH	PJ970001 - PJ970133

Parts Required: 2 - KRV # 700834 - Switch - 12V - Mom On/Off/Mom On - SPDT - 260F -

IP66 - Gasket - w/Extended Retract Print - w/Wire Harness - Black

(This part may be ordered in bulk without a VIN)

6 - Wire connectors purchased locally

Electrical tape purchased locally

Tools Required: - Screw gun - Wire cutters/strippers

<u>Note – Check serial number on Key Express to verify the campaign is open. Some vehicles were repaired before they left Keystone.</u>

When performing warranty or recall service, please make certain that appropriate Personal Protective Equipment (PPE) is used.

The remedy is to replace the existing stabilizer jack switches with the waterproof switches, 2 – KRV # 700834 - Switch - 12V - Mom On/Off/Mom On - SPDT - 260F - IP66 - Gasket - w/Extended Retract Print - w/Wire Harness – Black.


REPAIR INSTRUCTIONS

Step 1

Locate the trailer on a level, flat, hard surface. Chock the wheels. Disconnect 12VDC and 120VAC.

Step 2

Remove the existing switches on each of the two stabilizer jacks that do not have waterproof tape wrapped around the back of the stabilizer jack switch connection.

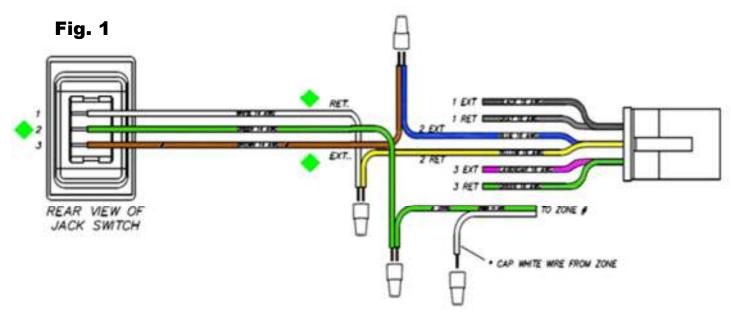

Step 3

Using the replacement stabilizer jack switches, KRV # 700834 - Switch - 12V - Mom On/Off/Mom On - SPDT - 260F - IP66 - Gasket - w/Extended Retract Print - w/Wire Harness — Black, match the wire colors using the diagram in Figure 1. Stabilizer Jack wiring to unit harness wiring - White to Yellow, Green to Green, and Brown to Blue. Any remaining harness wires should be capped off and not used.

Step 3

Proceed to Warranty Reimbursement.

WARRANTY REIMBURSEMENT

REPAIR

Submit the claim on Key Express using Flat Rate Code # 7143542B

In the <u>Complaint</u> section note: Safety Advisory # 22-435

In the <u>Cause</u> section note: Safety Advisory # 22-435

In the <u>Correction</u> section note: Replaced stabilizer jack switches

The amount of time authorized for this repair is **0.5 hour**.

PARTS DISPOSITION

No return part.

Please call Keystone RV Customer Service at **855-382-4100** if you have any questions.