


**14" 12V Roof Vent Fan Lid
Replacement Instructions**



Installation Guide

Parts List

(Not to scale)

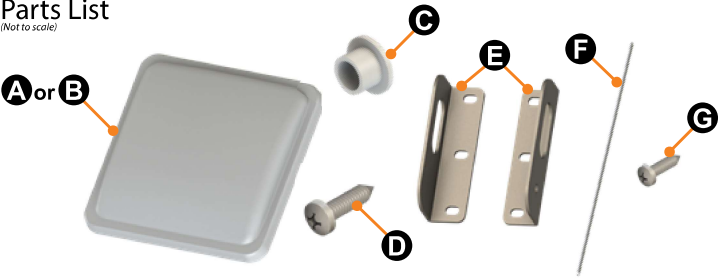

Fan Lid Replacement Kit PN 2023054272 (White) 2024111199 (Smoke)			
Letter	Part	Description	Qty.
A	2025068732	Replacement Lid (White)	1
B	2025068733	Replacement Lid (Smoke)	1
C	2025068565	Arm Bushing	3
D	2025068715	Lid Bracket Screw	6
E	2025068642/ 2025068643	Lid Brackets (L and R)	1 of each
F	2023054306	Hinge Rod	1
G	2023057139	Hinge Rod Screw	2

Applicable Products

Lippert PN	Furrion Model	Description
2022127925	FVF14D90A-PS-OEM	14" 12V Vent Fan, Manual Open/Close, White Lid, OEM
2022127924	FVF14D90A-GS-OEM	14" 12V Vent Fan, Manual Open/Close, Smoke Color Lid, OEM
2022403234	FVF14D90R6A-PS-AM	14" 12V Vent Fan with 6" Trim Ring, Manual Open/Close, White Lid, AM
2022403233	FVF14D90R6A-GS-AM	14" 12V Vent Fan with 6" Trim Ring, Manual Open/Close, Smoke Color Lid, AM
2023057487	FVF14D90A-PW-OEM	14" 12V Vent Fan, Manual Open/Close, Polar White Lid, OEM
2023042193	N/A	14" 12V Vent Fan With 6" Trim Ring, Manual Open/Close, Polar White Lid, AM

Resources Required

⚠ #2 Phillips Head Screwdriver

Preparation

1. Using three lid bracket screws (Fig. 1A), attach a metal lid bracket (Fig. 1B) to the underside of the lid at the molded platform (Fig. 1C). The bracket slot should face away from the center of the lid and be oriented towards the top of the lid, away from the hinge side.
2. Repeat with the other metal lid bracket on the opposite molded platform on the underside of the lid (Fig. 2).

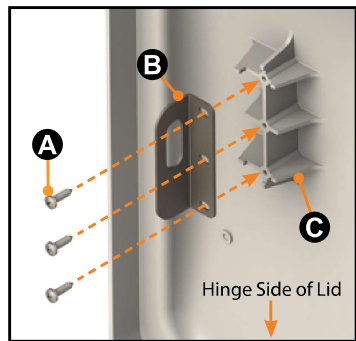


Fig.1

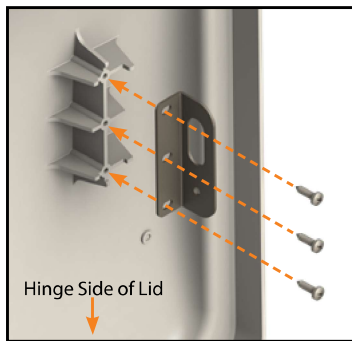


Fig.2

Installation

1. Disconnect the RV from AC and DC power.
2. Inside the RV locate the vent fan. Pull the lid knob (Fig. 3A) to unlock it, and turn it clockwise to fully open the lid (Fig. 4).
3. Gather the prepared lid, plastic bushings, metal hinge rod and hinge screws, and move on top of the roof of the RV. Locate the open vent fan on top of the roof.

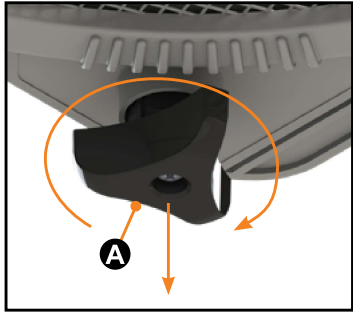


Fig.3

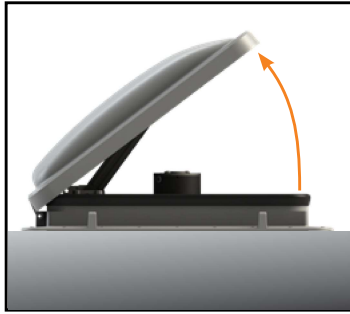


Fig.4

4. Remove the old lid by unscrewing the hinge screws then use the new hinge rod to push out the old hinge rod.

5. Align the hinge holes of the new lid (Fig. 5A) and fan (Fig. 5B), and slide the hinge rod (Fig. 5C) through them to create the hinge.

6. Secure the hinge by installing the two hinge screws; one on either side of the hinge. Do not overtighten.

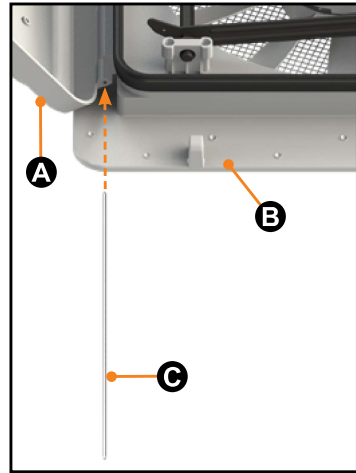


Fig.5

7. Install new bushings (Fig. 6A) onto the pegs of the lid lifting mechanism arms (Fig. 6B).

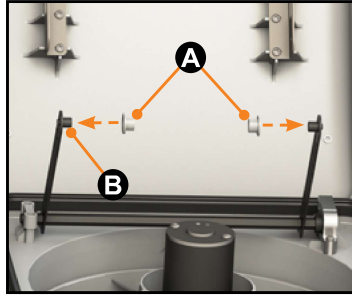


Fig.6

8. Slightly bend the lid lifting mechanism arms to slide the bushings/pegs into the slots of the lid brackets (Fig. 7).



Fig.7

9. Verify the lid mechanism works by returning to the interior of the RV and using the lid knob.



Whenever, wherever, we make
your experience better.

Manual information may be distributed as a
complete document only, unless Lippert provides
explicit consent to distribute individual parts.

All manual information is subject to change without
notice. Revised editions will be available for free
download at lippert.com. Manual information is
considered factual until made obsolete by a revised
version.

Please recycle all obsolete materials and contact
Lippert with concerns or questions.

