

BEDS

Purpose

This document outlines the installation instructions for the HappiJac® sofa back rest locks. The HappiJac sofa back rest locks are used with the swing-down sofa hinge brackets to lock the back rests from swinging outward when sofas are set down vertically along the the RV wall.

Safety

Read and understand all instructions before installing or operating this product. Adhere to all safety labels.

This document provides general instructions. Many variables can change the circumstances of the instructions, i.e., the degree of difficulty, operation and ability of the individual performing the instructions. This document cannot begin to plot out instructions for every possibility, but provides the general instructions, as necessary, for effectively interfacing with the device, product or system. Failure to correctly follow the provided instructions may result in death, serious personal injury, severe product and/or property damage.

⚠ CAUTION

The “CAUTION” symbol above is a sign that a safety risk is involved and may cause personal injury and/or product or property damage if not safely adhered to and within the parameters set forth in this manual.

⚠ CAUTION

Always wear eye protection when performing service, maintenance or installation procedures. Other safety equipment to consider would be hearing protection, gloves and possibly a full face shield, depending on the nature of the task.

⚠ CAUTION

Moving parts can pinch, crush or cut. Keep clear and use caution.

Installation

1. Place flat washer on bolt, then put the bolt through the thin oval slot in the sofa lock (Fig. 1).

NOTE: Right side installation shown. Bolt will come through from from opposite side for left side installation.


Fig. 1



BEDS

2. Install the sofa lock (notch up) inside of the sofa hinge bracket as shown in Fig. 2, with the bolt coming from the inside out.

Fig. 2

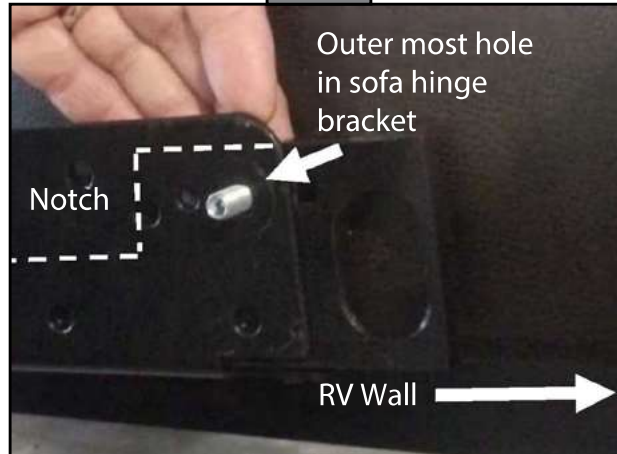

3. Install flat washer and self-locking nut (Fig. 3). Tighten until nut just begins to snug, then back the nut off just enough that the sofa lock slides freely. The lock should freely drop into locking mode when the sofas are set down vertically.

Fig. 3

