



Pleasure-Way

phone 306.934.6578
fax 306.934.7085
toll free 1.800.364.0189

Pleasure-Way Industries Ltd. | 302 Portage Avenue | Saskatoon, SK | S7J 4C6

****Serial number of original and replacement inverter must be provided****

Before you begin, turn off the Inverter master switch located beneath the sofa at the rear doors of the coach. Make sure you're not connected to shore power or running the generator.





The inverter is located inside the passenger side ottoman seat. Remove the cover from the ottoman seat by removing the Robertson screws in the base (lowest portion) of the ottoman seat and the L-brackets securing the inverter cover panel.



There will be enough wiring to remove the inverter from where it is mounted and rest on the top ledge of the ottoman seat. Disconnect the 120v wiring, 12v wiring, RV-C connection and BTS (battery temperature sensor).

* With the Inverter master switch off, there is no voltage supplied by the batteries. The inverter capacitors may still contain voltage.

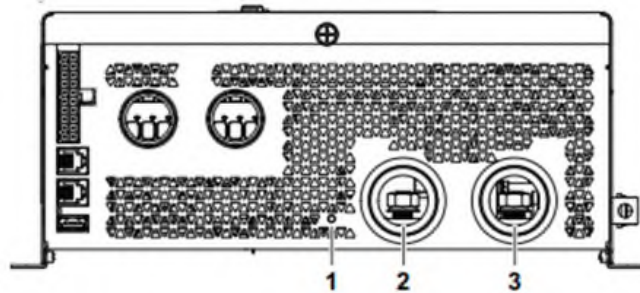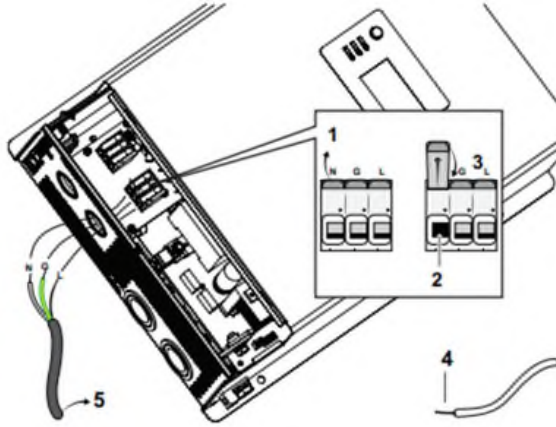

1	reverse polarity LED
2	positive (+)
3	negative (-)



* I will send additional clamps for the 120v knockouts which make installation easier. Use these in place of the plastic factory knockouts provided by Xantrex.

Re-install the 120v wiring, making sure to not put any stress onto the wago connectors. The wiring should be coming in as straight as possible and not in on an angle. Be careful not to pinch any insulation when closing the wago connection.

Tighten the 12v wiring down to a maximum of 80 in-lb (9 N-m) of force

Re-connect the RV-C connection

***Do not reconnect the BTS (battery temperature sensor). Tape the end of this cable and leave out of the inverter secured to the wiring bundle.**

The LFP charge profile does not adjust the settings due to temperature.

The power button on the inverter must always remain in the on position so that we can communicate with the inverter on the network.

Once the installation is complete, we need to reprogram the inverter settings. Turn on the Inverter master switch under the sofa to restore 12v power to the inverter.

Next, go to the settings page of the Spyder Controls LCD screen and press and hold your finger on coach model. When prompted, type in 8365.

On the bottom of the page, you will see battery settings. Press this selection.

Press the default settings selection on the right hand side of the page.

Follow the prompts and the bottom of the page to restore default settings.

This will bring you back to the battery settings page and the values should all read as:

Battery type should be lithium

LBCO is 12.1v

Charge rate 65%.

Hibernate timer is disabled.

Exit out of program settings.



Installation is now complete. The inverter when no utility is available should supply power to the receptacles, cooktop, microwave and AC. The inverter should also charge the batteries when connected to a 120v source such as shore power or generator. The charge rate will be roughly 95 amps DC if no other appliances are being used.