

# SOP05399

## QAAR 9932 Extend Fridge Frame Heat Deflector

Department: 32  
 People Required: 1  
 Time to Complete: 15 min  
 Date Created: 5-4-21  
 Date Revised: 6/29/21 Rev #: 1  
 Created by Initial: GK806 Verified: BH

Tools needed:



Step Ladder



#2 Robertson (square)




Silicone




Repair Kit: Deflector Extension and two #8 X 1" screw 141-0095

1

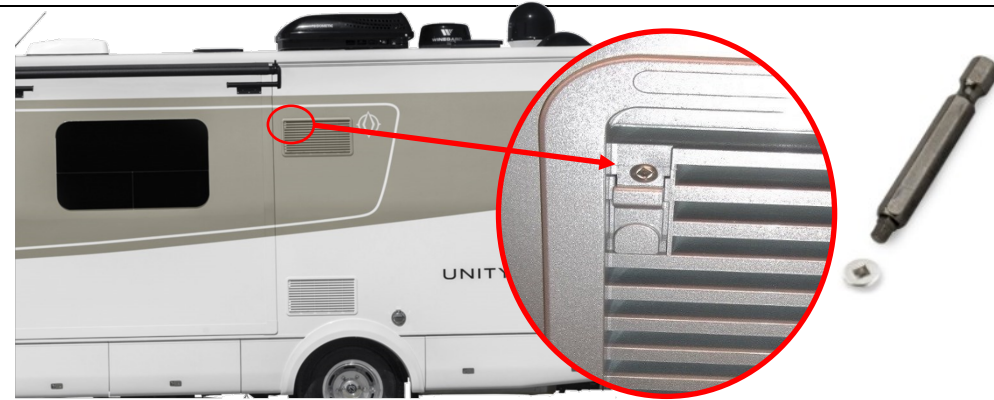

Remove the #8 screw from the top corner fridge using a #2 Robertson bit put aside for later.

2

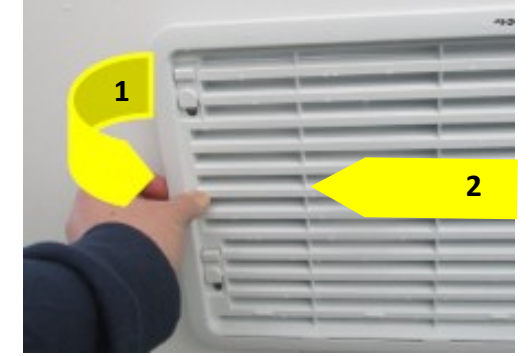

Lift both tabs up and remove vent by pulling on the left side of the vent and then sliding it out. Set vent aside.

3



We are going to extend this deflector

Locate the fridge exhaust at the right side of the vent slightly below the opening


Fridge exhaust

4



Wipe clean the back side of the deflector as shown.

5

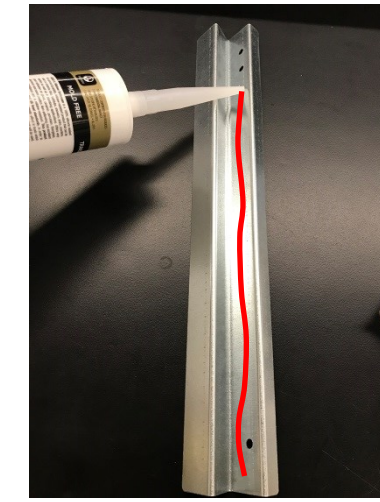

Apply Silicone to the same surface that was just wiped clean. This will be the side that is mounted to the fridge cabinet wood frame.

6



Insert the heat deflector through the top vent with the two holes at the top and the siliconed surface against the wooden frame.

The heat deflector extension should slide between the fridge exhaust and the wooden frame.

7



Ensuring that the deflector is all the way against the top wooden cleat. Secure deflector extension to the wooden frame through the top two screw holes with the two screws provided.

8



Reinstall vent by lining up the tabs on the right side of the frame with the slots in the grill and pivot the left side in. Push top clip down and install screw into metal plate (be careful not to strip the screw). Push bottom clip down until it locks onto plastic tab (you should hear it "click" into place).

9