

TIRE AND LOADING INFORMATION
RENSEIGNEMENTS SUR LES PNEUS ET LE CHARGEMENT

CAUTION:
A full load of water equals 177 Kg/390 Lbs of cargo @ 1 Kg/L (8.3 lb/gal)
The weight of the cargo should never exceed 308 Kg or 678 Lbs.

TIRE PNEU	SIZE DIMENSIONS	COLD TIRE PRESSURE PRESSION DES PNEUS A FROID	SEE OWNER'S MANUAL FOR ADDITIONAL INFORMATION
FRONT AVANT	ST225/75/R15 D	448 KPA/65 PSI	VOIR LE MANUEL DE L'USAGER POUR PLUS DE RENSEIGNEMENTS
REAR ARRERE	ST225/75/R15 D	448 KPA/65 PSI	
SPARE DE SECOURS	ST225/75/R15 D	448 KPA/65 PSI	

CARGO CARRYING CAPACITY: 131 Kg/288 Lbs
CALCULATED WITH THE FRESH WATER
TANKS FULL (COLD 154 Kg/ 340 Lbs
HOT 23 Kg/ 50 Lbs)
AND THE WASTE WATER TANKS EMPTY

CAPACITE DE CHARGEMENT: 131 Kg/288 Lbs
CALCULEE AVEC LES RESERVOIRS D'EAU
DOUCE PLEINS (FROID 154 Kg/ 340 Lbs
CHAUD 23 Kg/ 50 Lbs)
ET LES RESERVOIRS D'EAUX USEES VIDES.

**MASS OF WASTE WATER
WHEN TANKS ARE FULL:**
483 Kg
664 Lbs

**MASSE DES RESERVOIRS
D'EAUX USEES PLEINS:**
483 Kg
664 Lbs

RECREATION VEHICLE TRAILER CARGO CARRYING CAPACITY
VIN: 5SFPB1917ME456898 DRY WEIGHT: 1894 Kg or 4176 Lbs.

CAUTION:
A full load of water equals 177 Kg/390 Lbs of cargo @ 1 Kg/L (8.3 lb/gal)
The weight of the cargo should never exceed 308 Kg or 678 Lbs.

MANUFACTURED BY/FABRIQUE PAR: HEARTLAND RECREATIONAL VEHICLES
DATE 2021-03-01
GVWR/PNBV 2209 Kg 4870 Lbs
GAWR (EACH AXLE)/PNB (CHAQUE ESSIEU) 1996 Kg 4400 Lbs
TIRES/PNEU ST225/75/R15 D RIM/JANTE 75 X 6J
COLD INFL. PRESS./PRESS. DE GONFL. A FROID 448 KPA (65 PSI/LPC)

THIS VEHICLE CONFORMS TO ALL APPLICABLE U.S. FEDERAL MOTOR VEHICLE SAFETY STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE. THIS VEHICLE CONFORMS TO ALL APPLICABLE STANDARDS PRESCRIBED UNDER THE CANADIAN MOTOR VEHICLE SAFETY REGULATIONS IN EFFECT ON DATE OF MANUFACTURE. - CE VEHICULE EST CONFORME A TOUTES LES NORMES QUI LUI SONT APPLICABLES EN VERTU DU REGLEMENT SUR LA SECURITE DES VEHICLES AUTOMOBILES DU CANADA EN VIGUEUR A LA DATE DE SA FABRICATION

V.I.N./N.I.V. 5SFPB1917ME456898 TYPE/TYPE: TRAILER / TRA / REM
MODEL: SS171 Pioneer

Section 1 – Capacity

Section 2- Tire information

Section 3- Cargo capacities

Section 4 – Federal ID

The V.I.N. tag is broken into four sections. You will need to replace all four sections.

IMPORTANT: DO NOT APPLY NEW LABELS OVER THE EXISTING LABELS.

1. Locate sections 1, 2 and 4 on the driver's side of your unit, typically just above the baggage door. Remove sections 1, 2 and 4 from your sidewall using a plastic scraping tool being careful not to scratch your unit. You may use isopropanol alcohol to assist with adhesion removal if needed.
2. Locate sections 1, 2 and 4 in the new set you received in the mail, remove from backer and carefully place on side wall in the order you removed them.
3. Locate section 3 in the door jamb closest to the hinge of the entrance door. Remove section 3 from your door jamb using a plastic scraping tool, being careful not to scratch your unit. You may use isopropanol alcohol to assist with adhesion removal.
4. Remove section 3 from the backer and place on the inside of the door jamb.




Section 3 – Cargo capacities applied to the inside of the door jamb.



Section 4 – Federal ID

Section 2- Tire information

Section 1 – Capacity

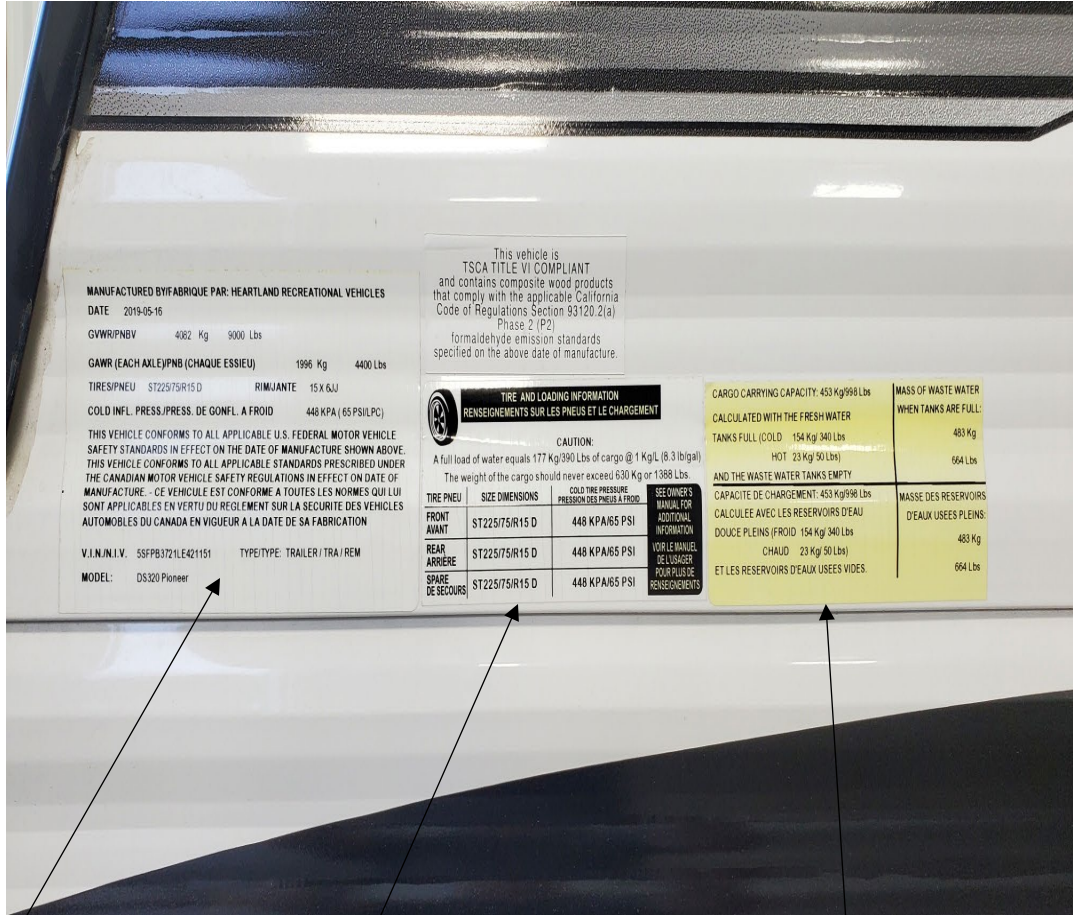

Section 4 – Federal ID

Section 2 – Tire information

Section – 1 capacity

MANUFACTURED BY/FABRIQUE PAR: HEARTLAND RECREATIONAL VEHICLES
 DATE 2019-05-16
 GVWR/PBV 4082 Kg 9000 Lbs
 GAWR (EACH AXLE/PNB (CHAQUE ESSIEU)) 1996 Kg 4400 Lbs
 TIRES/PNEU ST225/75R15 D RIM/JANTE 15 X 6J
 COLD INFL. PRESS./PRESS. DE GONFL. A FROID 448 KPA (65 PSI)(PC)
 THIS VEHICLE CONFORMS TO ALL APPLICABLE U.S. FEDERAL MOTOR VEHICLE SAFETY STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE. THIS VEHICLE CONFORMS TO ALL APPLICABLE STANDARDS PRESCRIBED UNDER THE CANADIAN MOTOR VEHICLE SAFETY REGULATIONS IN EFFECT ON DATE OF MANUFACTURE. - CE VEHICULE EST CONFORME A TOUTES LES NORMES QUI LUI SONT APPLICABLES EN VERTU DU REGLEMENT SUR LA SECURITE DES VEHICLES AUTOMOBILES DU CANADA EN VIGUEUR A LA DATE DE SA FABRICATION
 V.I.N./N.I.V. 5FPB3721LE421151 TYPE/TYPE: TRAILER / TRA / REM
 MODEL: DS320 Pioneer

This vehicle is TSCA TITLE VI COMPLIANT and contains composite wood products that comply with the applicable California Code of Regulations Section 93120.2(a) Phase 2 (P2) formaldehyde emission standards specified on the above date of manufacture.

TIRE AND LOADING INFORMATION
 RENSEIGNEMENTS SUR LES PNEUS ET LE CHARGEMENT

CAUTION:
 A full load of water equals 177 Kg/390 Lbs of cargo @ 1 Kg/L (8.3 lb/gal)
 The weight of the cargo should never exceed 630 Kg or 1388 Lbs.

TIRE/PNEU	SIZE DIMENSIONS	COLD TIRE PRESSURE PRESSION DES PNEUS A FROID	SEE OWNER'S MANUAL FOR ADDITIONAL INFORMATION VOIR LE MANUEL DE L'USAGER POUR PLUS DE RENSEIGNEMENTS
FRONT AVANT	ST225/75R15 D	448 KPA/65 PSI	
REAR ARRIERE	ST225/75R15 D	448 KPA/65 PSI	
SPARE DE SECOURS	ST225/75R15 D	448 KPA/65 PSI	

CARGO CARRYING CAPACITY: 453 Kg/998 Lbs	MASS OF WASTE WATER WHEN TANKS ARE FULL:
CALCULATED WITH THE FRESH WATER TANKS FULL (COLD 154 Kg/340 Lbs HOT 23 Kg/50 Lbs)	483 Kg 664 Lbs
AND THE WASTE WATER TANKS EMPTY CAPACITE DE CHARGEMENT: 453 Kg/998 Lbs CALCULEE AVEC LES RESERVOIRS D'EAU DOUCE PLEINS (FROID 154 Kg/340 Lbs CHAUD 23 Kg/50 Lbs) ET LES RESERVOIRS D'EAUX USEES VIDES	MASSE DES RESERVOIRS D'EAUX USEES PLEINS: 483 Kg 664 Lbs