



Procedure: L140-02.04

Operation: Rear spoiler anchorage


- 1.1 Fit the appropriate protection over the vehicle body to prevent it from being damaged.
- 1.2 Open the engine hood with (see the user manual).
- 1.3 Remove the panel (Fig. 1) under the engine hood by undoing the screws on the sides (total 11), in the grille area (total 12) and in the latch area (total 4).

Fig. 1



- 1.5 Undo the coupling (Fig.2).
- 1.6 Lock the RH/LH coupling threading using strong Loctite 52 A 70
- 1.7 Tighten the couplings appropriately.

Fig.2

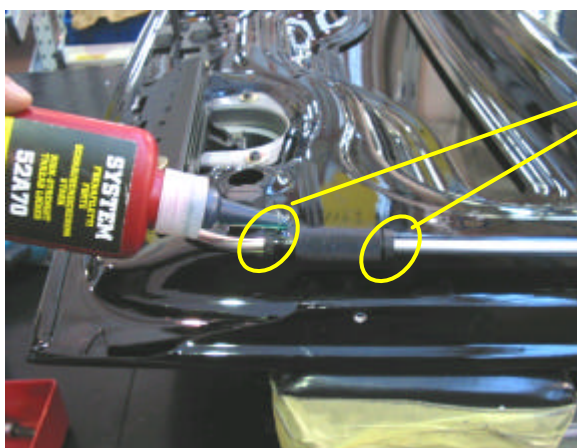

Apply a drop of strong Loctite 52 A 70 on these two points and tighten immediately RH/LH

- 1.6 Refit the panel and do up the clamp screws as required