Bulletin Number: 06-68-19R;	Revised: 07/11/19

Conti	inued
Page	e 1 of 2

#### CAUTION: VEHICLE SERVICING PERFORMED BY UNTRAINED PERSONS COULD **RESULT IN SERIOUS INJURY TO THOSE PERSONS OR TO OTHERS.**

Subaru Service Bulletins are intended for use by professional technicians ONLY. They are written to inform those technicians of conditions that may occur in some vehicles, or to provide information that could assist in the proper servicing of the vehicle. Properly trained technicians have the equipment, tools, safety instructions, and know-how to do the job correctly and safely. If a condition is described, DO NOT assume that this Service Bulletin applies to your vehicle, or that your vehicle will have that condition.

Continued... Subaru of America, Inc. is ISO 14001 Compliant

has been added to the brake pad installation procedures found in the related Service Manuals.

## **PART INFORMATION:**

Use either p.n. K0777YA010, Molykote AS-880N Brake Grease or the equivalent supplied in the replacement brake pad kit.

## **NOTES:**

- Part quantity 1 of K0777YA010 contains enough grease to repair 10 vehicles.
- Use p.n. SOA635318 (qty. 1) when submitting a related Warranty claim.

# **SERVICE PROCEDURE / INFORMATION:**

**REMINDER:** Customer satisfaction and retention starts with performing quality repairs.

6

SERVICE MANAGER

**APPLICABILITY:** 

SUBJECT:

**INTRODUCTION:** 

2019 S	ubaru of	America	Inc	All rights	reserved.	
2019 3	ubaru or	Amenica,	IIIC.	All Hyllis	ieseiveu.	

Legacy / Outback- All Models

Impreza- All Models


**Crosstrek- All Models** 

WRX- All Models Forester- All Models **BRZ-All Models Tribeca- All Models** 

SERVICE INFORMATION BULLETIN

Proper Grease Application during Brake Pad Installation

This Service Information bulletin announces instruction for application of additional lubrication between the brake caliper support and pad clips. This will prevent the pad from dragging due to corrosion buildup which may result in uneven or premature wear of the replacement brake pads. This additional instruction applies to all models with brake pads using the upper and lower pad clips and





**QUALITY DRIVEN® SERVICE** 


excellence in Environmental Management Systems. Please recycle or dispose of automotive products in a manner that is friendly

ISO 14001 is the international standard for

to our environment and in accordance with all

local, state and federal laws and regulations.


The EXAMPLE illustration shown below for reference is from a 2019MY Forester. The procedure below is applicable when replacing either FRONT or REAR brake pads.

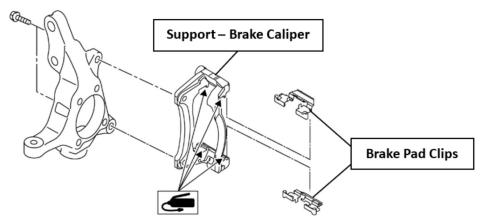


• Before installing new brake pads, remove the pad clips and **thoroughly** clean the caliper support of any dirt, rust or corrosion, paying close attention to the areas where the clips are attached / seated.

**REMINDER:** Always support removed calipers and NEVER allow them to hang by the brake hose.

• Apply a thin coating of brake grease to the caliper support then refit the pad clips to the support.



• Apply a thin coating of brake grease to the ends of the new brake pads where they contact the pad clips.



• Follow the remainder of the service procedure for reassembly as provided in the applicable Service Manual.

#### **IMPORTANT REMINDERS:**

- SOA strongly discourages the printing and/or local storage of service information as previously released information and electronic publications may be updated at any time.
- Always check for any open recalls or campaigns anytime a vehicle is in for servicing.
- Always refer to STIS for the latest service information before performing any repairs.