



Service Bulletin

Bulletin No.: 21-NA-190

Date: November, 2021



INFORMATION

Subject: Information on Front License Plate Installation

Brand:	Model:	Model Year:		VIN:		Engine:	Transmission:
		from	to	from	to		
BrightDrop	EV600	2022	2022			All	All

Involved Region or Country	United States and Canada only,
Information	Front License Plate Installation
Instructions	Refer to the installation procedure below.


Installation Procedure

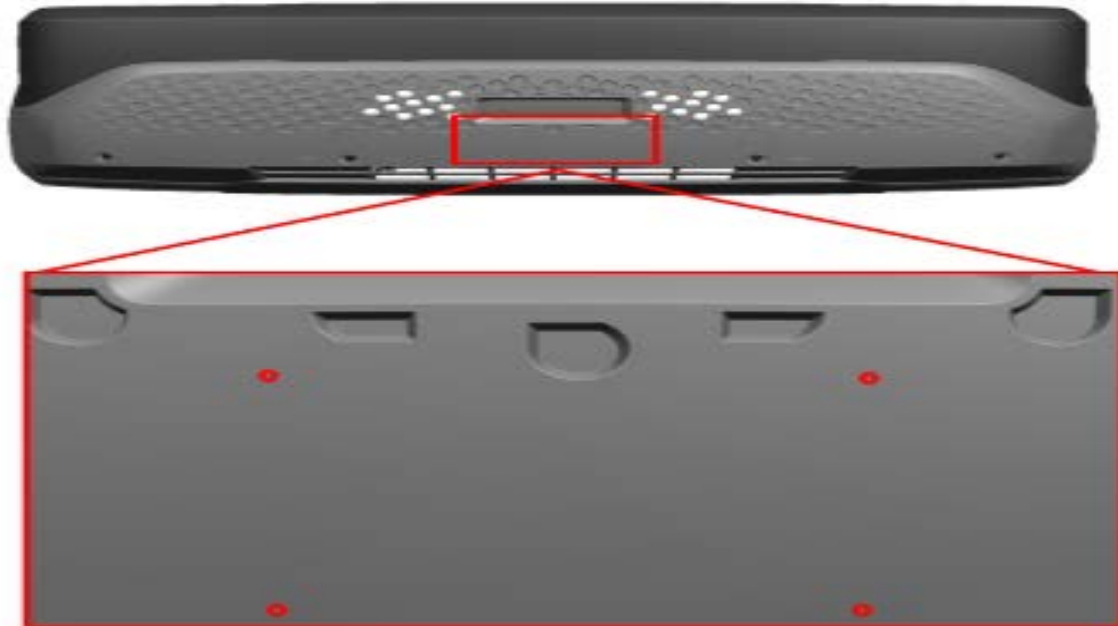

5893684


Note: This installation procedure should only be completed when the front license plate is ready to be installed.

1. Locate the dimples on the front fascia surface where the license plate will be installed. The front fascia has bosses that are molded into the front fascia behind these dimples, to provide support for the license plate.

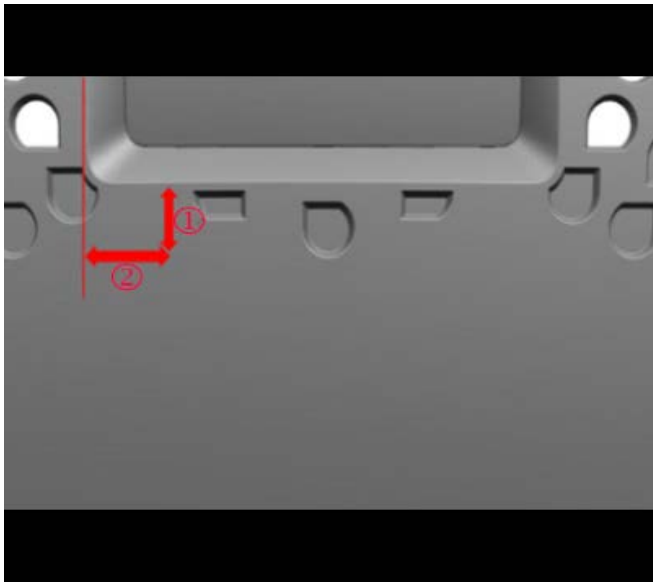


5893689

2. Line up the license plate with the dimples. The dimensions for the top left dimple (1) 35 mm (1.38 in) and (2) 45 mm (1.78 in) are shown in the graphic above, and can also be used as a guide for locating the remaining dimples.

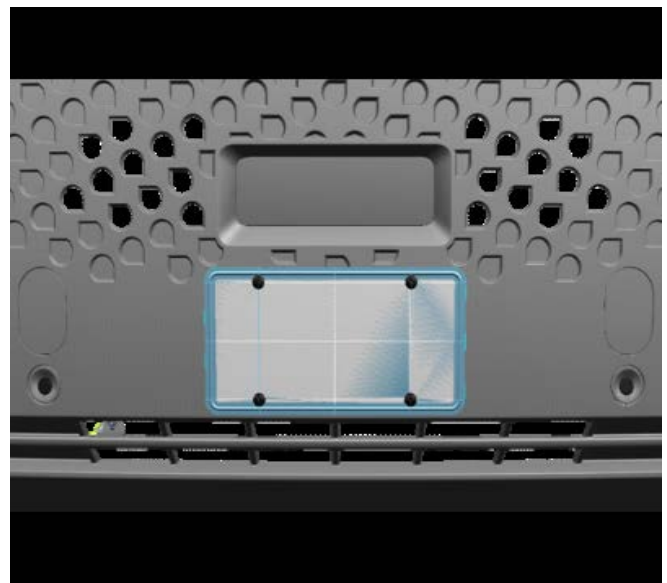

5893690

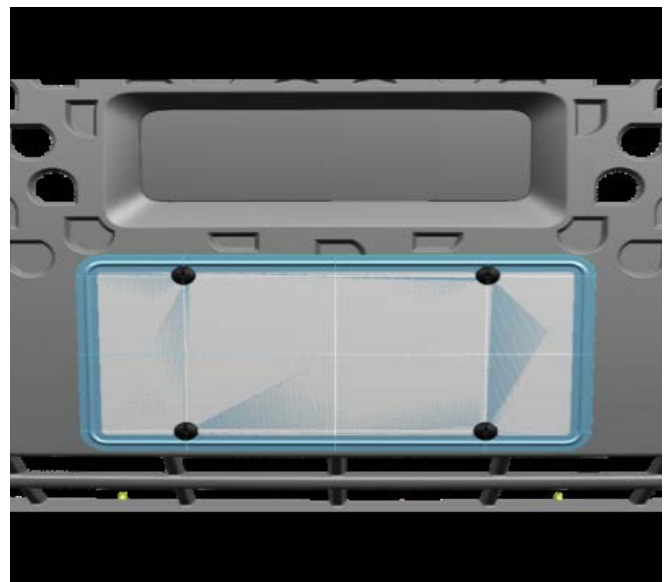

5893692

3. Drive the provided self tapping screws through the license plate and into the front fascia until the plate is secured to the front fascia. Do not over torque the screws.

Warranty Information

The labor time for installing the front license plate is included in the PDI time.

Version	1
Modified	Released November 10, 2021

