

ATTENTION:

- GENERAL MANAGER
- PARTS MANAGER
- CLAIMS PERSONNEL
- SERVICE MANAGER

IMPORTANT - All Service Personnel Should Read and Initial in the boxes provided, right.



QUALITY DRIVEN® SERVICE

SERVICE BULLETIN

APPLICABILITY: 2014MY Forester

NUMBER: 09-55-13

SUBJECT: Fuel Tank Insulation Pad / Fuel Delivery Tube Changes

DATE: 06/19/13

INTRODUCTION

This Bulletin informs of changes to both the padding on the fuel tank assembly and the cushions found on the fuel delivery tubing connecting the main fuel pump assembly to the sub-level unit (transfer pump).

COUNTERMEASURE IN PRODUCTION


The new parts were incorporated into production starting with VIN E*412069.

PART INFORMATION

PART NAME	NEW PART NUMBER	NOTES	OLD PART NUMBER	NOTES
Tube Delivery	42074SG011	3 Pieces of Tube Cushion	42074SG010	1 Piece of Tube Cushion
Tube Delivery Sub	42074SG021	3 Pieces of Tube Cushion	42074SG020	2 Pieces of Tube Cushion
SEAT TANK B (Insulation Pads)	n/a	See Note Below	42016CA010	See Note Below

NOTE: Part interchangeability is from NEW to OLD only

SERVICE PROCEDURE / INFORMATION

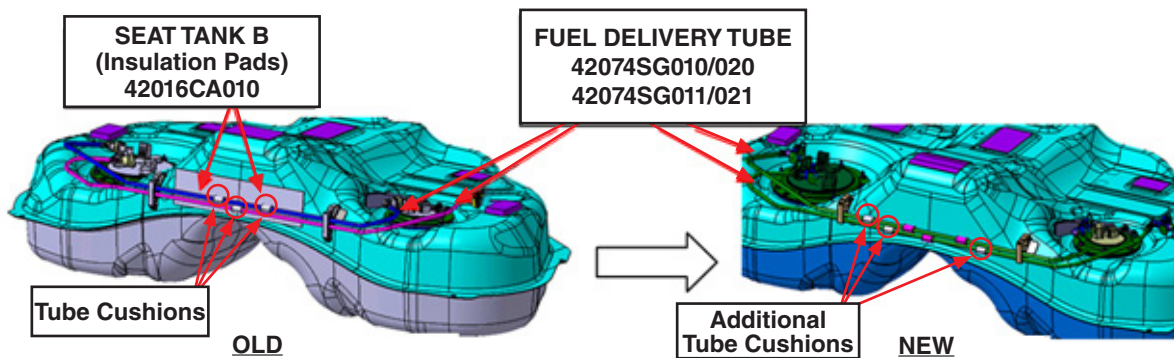

Continued...

CAUTION: VEHICLE SERVICING PERFORMED BY UNTRAINED PERSONS COULD RESULT IN SERIOUS INJURY TO THOSE PERSONS OR TO OTHERS.

Subaru Service Bulletins are intended for use by professional technicians ONLY. They are written to inform those technicians of conditions that may occur in some vehicles, or to provide information that could assist in the proper servicing of the vehicle. Properly trained technicians have the equipment, tools, safety instructions, and know-how to do the job correctly and safely. If a condition is described, DO NOT assume that this Service Bulletin applies to your vehicle, or that your vehicle will have that condition.

SUBARU OF AMERICA, INC. IS "ISO 14001 COMPLIANT"

The international standard for excellence in Environmental Management Systems. Please recycle or dispose of automotive products in a manner that is friendly to our environment and in accordance with all local, state and federal laws and regulations.

Follow the procedures in the applicable Service Manual for fuel tank and delivery tubing R&R.

- **When replacing the fuel tank** and reusing the original fuel delivery tubes on the new tank, 2 pieces of insulation pad (SEAT TANK B) must be installed onto the new tank to prevent the fuel delivery tubes from contacting it. Peel the paper backing to expose the adhesive then apply to the new tank as shown in the illustration below.

NOTE: Before applying the new insulation pads, make sure that area of the tank is clean and dry.

- **When replacing only the fuel delivery tubes**, the existing SEAT TANK B (insulation pad) material can remain in place on the original fuel tank.
- **When replacing both the fuel tank AND the fuel delivery tubes**, SEAT TANK B (insulation pad) does **NOT** need to be installed onto the new tank due to the additional tube cushions included with the new tubes.

Installation Locations for Installation of SEAT TANK B (insulation pad) Material

