

SERVICE MANUAL BULLETIN

This Service Manual Bulletin is prepared by the Publications Department of New Flyer Industries Canada ULC. Refer to details below.

SMB-152

ISSUE DATE: Dec 10 2015

APPLICABILITY					
VEHICLE LENGTH	□ 30ft.	□ 35ft.	□ 40ft.	□ 60ft.	■ ALL
VEHICLE TYPE	☐ High Floor	■ Low Floor	■ Invero®	■ Xcelsior®	□ ALL
FUEL TYPE	□ Diesel	□ Electric	□ CNG	□ LNG	■ ALL
	☐ Diesel/Electric	☐ Gas/Electric	☐ Fuel Cell		
SUBJECT	Disc Brake Pad Installation				
SECTION TITLE	1 - FRONT AXLE & SUSPENSION - VOK-07F 2 - REAR AXLE & SUSPENSION - HY-1336-P HY-1350-F				
DETAILS	This bulletin provides revised OEM information on the installation of the disc brake pads on your New Flyer Vehicle.				
This bulletin supersedes all prior information on this subject vided in your New Flyer Service Manuals and SMB-149 released. 20, 2015. Make this Service Bulletin available to service persinform them of changed information.					October



1. Front & Rear Disc Brakes

1.1. Installation

™NOTE:

It may be necessary for the abutments of the carrier and guiding surfaces of the brake pad to be coated with a suitable permanent lubricant. See "Fig. 1: Areas to Apply Lubricant" on page 2. The following products are approved for this application: Textar CERA TEC®, ATE Plastilube®, Dow Corning P-40® Paste.



DO NOT use copper based lubricant. DO NOT get any lubricant on the pad and/or disc face or guide sleeve parts.

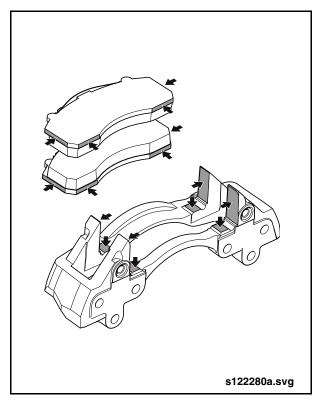


Fig. 1: Areas to Apply Lubricant